

1510 Side Mounted Level Switch

Form 498CM

1510 is a horizontally mounted, float-operated level switch suitable for plant and OEM applications where open or closed contacts are required to signal presence or absence of liquid at a discrete level. The float extension arm moves a magnet which actuates (deactuates) a hermetically sealed reed switch. Actuation (deactuation) can be reversed by rotating the unit 180 degrees.



Product Specifications

Mounting	
Orientation	Horizontal mount only
Connection Size	1-1/2" through 6"
Connection Type	NPT(M) or Flanged
Maximum Process Pressure* up to 5000 psi (345 bar)	
Process Temperature Range -40 to 400°F (-40 to 204°C)	
Electrical	
Switch Type	Hermetically sealed reed switch with 18" 20 AWG wire leads
Housing	Class I, Groups A, B, C & D; Divisions 1 & 2 with CS option
Relay Housing	Class I, Groups C & D; Divisions 1 & 2 with CS option
Connection Size	1/2" NPT(F)
Minimum Specific Gravity	0.45
Design Code	ANSI B31.3
Weight	Approximately 6 lbs. (3 kg)
Agency Listing*	CSA Certified (US & Canada) and ANSI/ISA 12.27.01, ATEX and IEC approved (optional). See page 2.


*Agency certifications may affect ratings. See Accessories for details.

Dimensions

Design and specifications are subject to change without notice.

Linear = mm/inches

Drawing 0390693

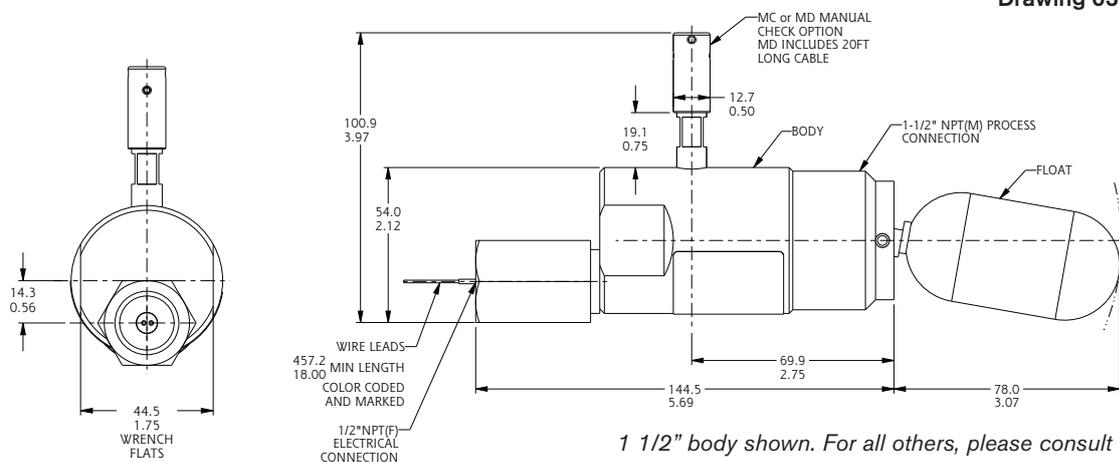

1 1/2" body shown. For all others, please consult factory.

1510 Side Mounted Level Switch

How to Order

Model Number System

4 Switch Mechanisms

Amperages based on resistive loads

General Purpose	SPST	0.9A @ 110 VAC Max 3A @ 28 VDC Max 3 Watt Minimum	a
General Purpose	SPDT	0.9A @ 110 VAC Max 3A @ 28 VDC Max 3 Watt Minimum	b
Low Power	SPST	25 Watts Max	c
Low Power	SPDT	25 Watts Max	d

3 Float Material

316SS (Standard)	1500 psig (103 bar) -40 to 400°F (-40 to 204°C)	a
Monel	900 psig (62 bar) -40 to 400°F (-40 to 204°C)	b
Polypropylene	5000 psig (345 bar) -40 to 150°F (-40 to 65°C)	c

2 Process Connections

Threaded:	1 1/2" NPT(M)	a	
	2" NPT(M)	b	
Flanged: (Available with 316SS body only) May affect process pressure rating.	2 1/2" 150#	c	
	300#	d	
	600#	e	
	3" 150#	300#	f
		600#	g
		600#	h
	4" 150#	300#	i
		300#	j
	6" 150#	300#	k
		300#	l

1 Body Material

303SS (Standard)	a
316 Stainless Steel	b

5 Optional Accessories

	Insert accessory designator(s) as needed
a*	ATEX and IECEx dual approved. Ex d IIC Ga/Gb T4 (-40°C < Ta < +90°C), T5 (-40°C < Ta < +75°C) and Ex ia IIC T3 (-40°C < Ta < +125°C)
b*	ATEX and IECEx approved. Ex ia IIC T3 (-40°C < Ta < +125°C)
c	3/4" NPT(F) conduit connection
d*	CSA Certified. Class 1, Group A, B, C, D; Divisions 1 & 2. For relay option; Class 1, Group C & D, Divisions 1 & 2. Single seal ambient & process temperatures -40°C to +125°C. Additional seal not required.
e**	Manual check accessory (uses Viton GLT o-rings)
f**	Manual check accessory (uses Viton GLT o-rings) with 20' remote cable
g	NACE construction - MR 01-75 / ISO 15156 2003. Available only with 316SS materials of construction
h***	24 VDC powered DPDT relay in explosion proof terminal box. Contact rating: 10 amps @ 115 VAC. Class I, Group C, D; Divisions 1 & 2.
i***	120 VAC powered DPDT relay in explosion proof terminal box. Contact rating: 10 amps @ 115 VAC. Class I, Group C, D; Divisions 1 & 2
jj**	Tag, stainless steel. (Attached with stainless steel wire to housing. Stamped with customer specified tagging information. 2 lines, 18 characters and spaces per line.)
k	Stainless steel nameplate permanently attached to housing. Stamped with customer specified tagging information.

* a,b or d option is required on all fange mounted units.

**Manufacturer limits on Viton GLT are -40 to 400°F.

***Not available with h or i switch options.

1510 Side Mounted Level Switch

Test Certificates

1510 Level Switch	Certificates	C1	C3	C4	C5	C6	C7	B5	B6	B7
	Calibration	◆						◆	◆	◆
	Inspection Report		◆					◆	◆	◆
	Compliance / Conformance			◆						◆
	Dielectric Test				◆			◆		
	Insulation Resistance					◆		◆	◆	
	QA Test Report						◆			

Replacement Parts

Part Number	Description
3130-106	SPST Hermetically Sealed Switch Capsule
3130-245	SPDT Hermetically Sealed Switch Capsule
3130-107	SPST Hermetically Sealed Switch Capsule
3130-244	SPDT Hermetically Sealed Switch Capsule
3130-052	316SS Float Assembly
3130-040	20' Remote Cable with two cable crimps*
9227-024	Manual Check Accessory (MC) (2" NPT only)*
9227-025	Manual Check Accessory with 20' remote cable (MD) (2" NPT only)*
9227-028	Manual Check Accessory (MC) (1 1/2" NPT only)*
9227-029	Manual Check Accessory with 20' remote cable (MD) (1 1/2" NPT only)*

*Unit must have originally been supplied with MC or MD option.

Limited Warranty

Cameron agrees to repair or replace any switch found to be defective in material or workmanship within five years from date of shipment. The limited warranty is valid only if the switch was installed in accordance with published factory installation instructions, operated within the design limitations stated on the nameplate, and returned to the factory for inspection, freight prepaid, within the warranty period. Contact the factory for return authorization. No claim for labor or consequential damages will be allowed.

Cameron_NuFlo流量仪表
分销商联系方式：

信德迈科技(北京)有限公司 CNMEC Technology Company
地址：北京朝阳区望京街10号望京SOHO-T1-C座2115室
邮编：100102
电话：010-8428 2935, 8428 9077, 8428 3983
手机：139 1096 2635
Http：//www.cnmec.biz
E-mail：sales@cnmec.biz
传真：010-8428 8762